

PROFESSIONAL
PROJECTOR

SP920P

DUAL LAMP HIGH BRIGHTNESS



Features

- Native XGA (1024 x 768) Resolution
- 6000 ANSI Lumens, 2000:1 Contrast Ratio
- Dual Lamp, 3 Sets of Lamp Mode
- 3D Color Management, Presentation Timer
- HDMI, I2V Trigger, HDTV Compatible

Top / Front View




Top



Front

Input and Output Terminals

Back

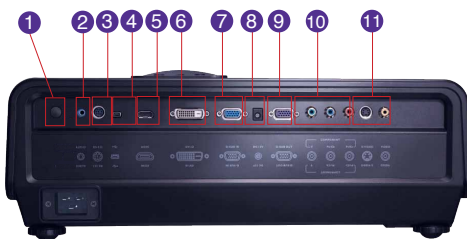

- | | |
|-----------------|-----------------------|
| 1 IR Sensor | 7 RGB In/Component x1 |
| 2 Audio In | 8 I2V Trigger x1 |
| 3 RS-232 x1 | 9 RGB Output x1 |
| 4 USB Mini-B x1 | 10 Component (RCA) x3 |
| 5 HDMI x1 | 11 S-Video /Video |
| 6 DVI-D x1 | |

Specifications

PRO AV

Native Resolution	XGA (1024 x 768)
Brightness	6000 ANSI Lumens
Contrast Ratio	2000:1 (Full on/Full off)
Keystone	Manual Vertical +/- 25°
Aspect Ratio	4:3 Native, 16:9 Selectable
Color	Full 16.7 Million colors palette
Lens	F = 2.4 ~ 2.7, f = 38.87 ~ 46.63mm
Zoom Ratio	Manual Zoom, 1.15:1
Image Size (Diagonal)	31" - 300"
Throw Ratio	1.64 to 1.89
Lamp Life	260W x2, 2000/3000 hours (Normal/Eco-Mode)
PC Compatibility	VGA (640 x 480) to UXGA (1600 x 1200)
HDTV Compatibility	480i, 480p, 576i, 576p, 720p, 1080i, 1080p
Video Compatibility	NTSC, PAL, SECAM
Horizontal Frequency	31-82 kHz
Vertical Scan Rate	48-85 Hz
Input Terminals PC/AV	Analog RGB/Component: D-Sub 15 Pin x1 HDMI (v1.3) x1 Component Video: RCA x3 S-Video: Mini Din 4 Pin x1 Composite Video: RCA x1 DVI-D (Support HDCP) x1 Stereo Mini-Jack x1
Output Terminals PC/AV	Analog RGB: D-Sub 15 Pin x1 Speaker: 5W Speaker x2 I2V Trigger x1
Control Terminals	Serial Connector: RS-232 8 Pin Mini Din USB Connector: USB x1 (Type Mini B)
Dimensions (W x H x D)	17.4" x 6.6" x 14"
Weight	24 lbs (11 kg)
Power Suply	100 to 240 VAC, 50/60 Hz
Power Consumption	Max. 805W
Noise Level	37/34 dBA (Normal/Eco-Mode)
Display Languages	English/French/German/Italian/Spanish/Russian/Traditional Chinese/Simplified Chinese/Japanese/Korean/Swedish/Dutch/Turkish/Czech/Portuguese/Thai/Polish
Picture Mode	Dynamic Mode/Presentation Mode/sRGB Mode/Cinema Mode/User 1 Mode/ User 2 Mode
Functions	3D Color Management, Dual Lamp, Quick Auto Search, Sleep Timer, Presentation Timer, Power On/Off Tone, Panel Key Lock, Resolution Reminder, "Q" Hot Key for FAQ, Freeze, Lamp Care, Wall Color Correction, BrilliantColor,VIDI, Blank (Eco-Mode) Quick Cooling, Auto Off, Security Password, My Screen, HDCP Compatible, HDTV Compatible, I2V Trigger, High Altitude Mode
Accessories (Standard)	Quick Start Guide/User's Manual/Manual CD/Remote Control/Batteries/VGA Cable/Power Cord
Accessories (Optional)	Presentation Plus, Spare Lamp Kit, Ceiling Mount
Dual Lamp P/N	Lamp #1 - 5J.J2D05.001, Lamp #2 - 5J.J2D05.011
Limited Warranty	3-Year Parts & Labor/ 1-Year or 2000 hours of lamp life

SP920P_DM_BQus_10-18-11



BenQ America Corp.
15375 Barranca Parkway, Suite A-205, Irvine, CA 92618 • Tel: (949) 255-9500 • www.BenQ.us



Enjoyment Matters

BenQ is a registered trademark of BenQ Corp. DLP is a registered trademark of Texas Instruments. All rights reserved. Corporate and trademarks are the property of their respective companies. Specifications subject to change without notice.